Equipment for Construction Professionals



laoishire.com



gpthire.ie



aerialplatform.ie














Welcome

At the Briggs group, we know the plant and tools that construction professionals need!

Our combined experience of over 100 years as a supplier to the construction industry has helped us shape an unrivalled offering, available across a countrywide network of 15 locations.

With GPT Hire, Laois Hire, and Aerial Platforms, we employ a staff of over 300, ready to deliver for our customers. At each location we stock, service, and maintain our equipment to the highest operational standards.

Across our group companies, across the island of Ireland, we look forward to serving you and meeting your needs as a construction professional!

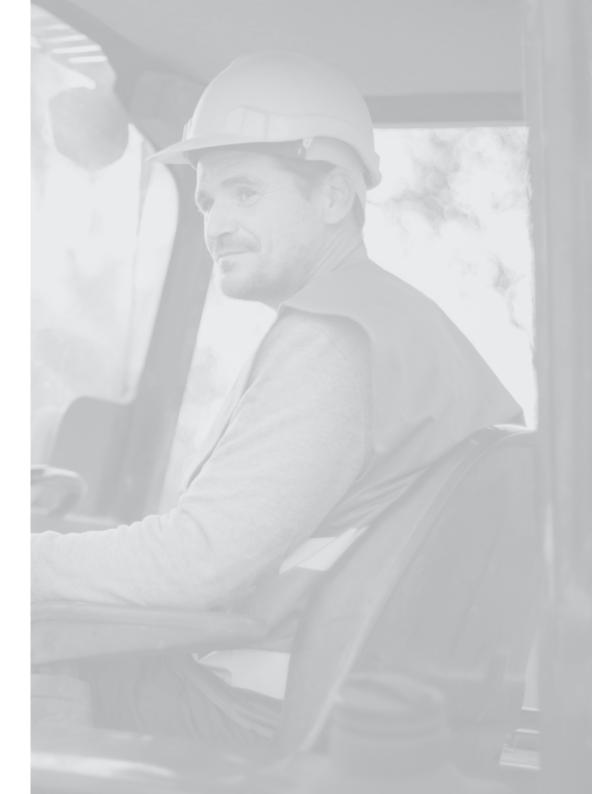

Contents

Plant	4 - 9
Vehicles	10 - 11
Road Sweeping	12
Lighting	13
Pumping	14 - 15
Powered Access	16 - 22
Power	23
Traffic Management	24 - 25
Variable Message Signs	26
Accommodation	27 - 30
Tools	31
Site CCTV Solutions	32 - 33

Mini Excavators















Model	0.8t	1.5t	1.8t (Electric)	2.8t
Width	0.86m	980mm	0.996mm	1500mm
Height	2.23m	2.25m	2.345m	2430mm
Max Dig Depth	1.6m	2.39m	2.819m	2910mm
Max Dump Depth	2.45m	2.70m	2.818m	3480mm

Excavators


















Model	3t	5t	8t	9.5t	13t
Width	1500mm	1960mm	2200mm	2320mm	2490mm
Height	2480mm	2550mm	2540mm	2550mm	3100mm
Max Dig Depth	2870mm	3380mm	4590mm	4150mm	6030mm
Max Dump Depth	3220mm	4088mm	4946mm	380mm	6520mm

Dumpers

















Model	Powered	1 Ton High	1 Ton	3 Ton	6 Ton	6 Ton	9 Ton	9 Ton	9 Ton	9t Straight
	Mini	Tip Track	High Tip	Swivel	Swivel	Swivel Cab	Straight Tip	Swivel Cab	Swivel	Cab
Payload	250kg	1000kg	1000kg	3000kg	6000kg	6000kg	9000kg	9000kg	9000kg	9000kg
Dimensions	1550 x	1900 x	2980 x	3952 x	4539 x	4590 x	4484 x	4912 x	5185mm x	4510 mm x
(LxW)	700mm	750mm	1120mm	1846mm	2207mm	2095mm	2500mm	2380mm	2325mm	2389 mm
Engine	5.5hp/ Unleaded Petrol	12.3kw	Kubota D905	Kubota V2203M	JCB EcoMax	55kw/ 74hp	JCB EcoMax	55kw/ 74 hp	55kw/ 74 hp	55kw/ 74 hp

Compaction


















Model	Ammann Remote Control Trench Roller	Bomag 65S Pedestrian Roller	Hamm 10 Roller	Bomag 120 Roller	Hamm 14 Roller	Bomag 213 Roller	HD 90 Tandem Roller
Width	601mm	650mm	1100mm	1199mm	1500mm	2130mm	1810mm
Power	14.6 kW	-	18.5kW	24.6kW	34.6kW	325/237kN	100kW
Weight	1340 kg	757kg	2475kg	2449kg	4345kg	14600kg	11840kg

Teleporters



















Model	Buggyscopic	6m Teleporter	14m Teleporter	17m Teleporter	18m Teleporter	2150 (Rotary)
Width	1.436m	1.84m	2.35m	2.5m	2.5m	2.49m
Height	1.95m	1.89m	2.59m	2.7m	2.8m	3.11m
Weight	4610kg	5230kg	10880kg	13560kg	14000kg	4,999kg
Max Lift Capacity	2500kg	2500kg	4000kg	4535kg	4535kg	-

Mutli-Terrain Loaders



















Model	GEHL R165	CASE 370B
Overall Operating Height Fully Raised	3.89m	2.65m
Overall length without bucket	2.39m	2.97m
Overall width without bucket	1.57m	1.94m
Overall Weight	2,795 kg	4,520 kg

Vehicles - Genreal Purpose Vehicles

General Purpose Vehicles





Classification	Manufacturer	Model
Compact Van	Ford	Transit Connect
Small Van	Ford	Transit Custom
Mid Van	Ford	Transit T350
Crew Cab Van	Ford	Transit T350 Crew Van
4 Wheel Drives - Pick Ups	Ford	Ranger

Specialty Vehicles





Classification	Manufacturer	Model
Tipper Vehicles	Ford	Transit T350 Tipper
Tipper Crew Cab Vehicles	Ford	Transit T350 Crew Van Tipper
7.5 Tonne - Single Cab	Mitsubishi / Isuzu / Similar	Canter / NPR / Similar
7.5 Tonne - Crew Cab	Mitsubishi / Isuzu / Similar	Canter / NPR / Similar
Tar Patcher	Mitsubishi / Isuzu / Similar	Canter / NPR / Similar
Minibus	Ford	Transit
Box Van	Ford	Transit
Pickup with Crane	Ford	Transit















Model	Johnston CN200/1(Compact)	Johnston 650/651 (Large)
Height	1.985m	3.40m
Weight	2,800kg	Carrier Dependent
Optimum Sweeping Width	2.30m	Up to 3.60m
Capacity	152 litres	1,534 litres
Stowed Width	1.315m	2.50m

13



















Model	VT1 Lighting Power	VB9 Lighting Tower	VT HYbrid Lighting Tower	X-Eco(LED-6) Lighting Tower
Runtime on Full Tank	66 hours	300 hours	660 hours	200 hours
Fuel Tank Capacity	112L	170L	160L	110L
Light Coverage	4200 sqm	3900 sqm	2500 sqm	3800sqm

Solid Handling Pumps









Model	\$100	S150	S160 Eco	S200	S300
Capacity m3/h	165	320	310	560	1100
Total Head m	21.3	21.3	27	23	32
Solids Size mm	75	100	100mm	100	120
Self Priming Lift m	8.8	8.8	8.8	8.8	8.8
Inlet / Outlet mm	100	150	102	200	300
Power Required kW	16	32	40	42	80
Pump Speed rpm	1600	1600	1800	1600	1600



















High-Head Pumps

Model	Н80	H100	H125	H150	H200	H100 HM	H150 HM	H200 HM
Capacity m3/h	95	225	TBA	450	750	225	450	950
Total Head m	95	120	TBA	106	158	79	95	85
Solids Size mm	19	30	ТВА	30	45	30	38	60
Self Priming Lift m	8.8	8.8	TBA	8.8	8.8	8.8	8.8	8.8
Inlet / Outlet mm	80	100	TBA	150	200	100	150	200
Power Required kW	30	82	TBA	138	330	87	130	250
Pump Speed rpm	2000	2200	TBA	1800	1800	2200	1800	1600

Straight Telescopic Booms















Model	Genie S45	Genie S65	Genie S85	Genie S85 XC	Genie S125	Genie SX125 XC
Working Height	15.5m	21.6m	27.7m	27.91m	40.1m	40.1m
Working Outreach	11.2m	17.2m	23.4m	22.71m	24.4m	24.38m
Platform Capacity	227kg	227kg	227kg	454kg	227kg	454kg
Width	2.3m	2.43m	2.43m	2.49m	3.5m	2.49m
Length Stowed	7.3/8.5m	8.3/9.4m	11.2/12.4m	11.60/12.37m	12.2m	12.19/14.25m
Height Stowed	2.5m	2.74m	2.79m	2.80m	3.07m	3.05m
Power Source	Diesel	Diesel	Diesel	Diesel	Diesel	Diesel
Weight	5284/6709kg	11,821/12,882kg	15,141/16,266kg	17,917kg	20,248kg	20,700kg














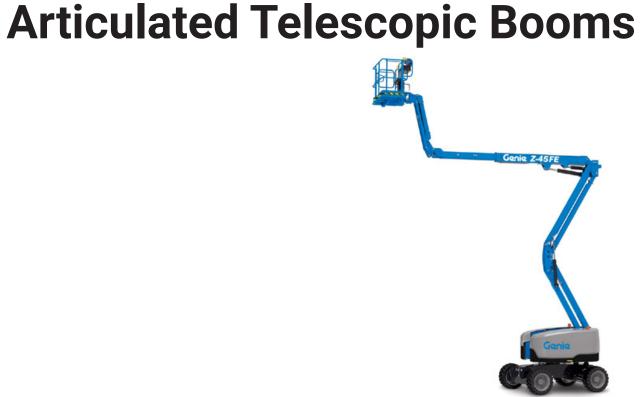

Model	Genie Z45/22	Genie Z60/34	Genie Z62/40	Genie Z80/60	Genie Z80/60 AWS
Working Height	15.5m	20.3m	20.87m	26.4m	25.77m
Working Outreach	7.0m	10.4m	12.42m	18.3m	18.29m
Platform Capacity	227kg	227kg	227kg	227kg	227kg
Width	1.7m/1.96m	2.41m	2.49m	2.49m	2.49m
Length Stowed	5.4m	7.9m	9.25m / 7.58m	9.14m	11.27m
Height Stowed	2.0m	2.64m	2.4m	3m	3m
Power Source	Diesel	Diesel	Diesel	Diesel	Diesel
Weight	6199kg	10,004kg	10,281kg	16,284kg	17,010kg

Electric/Hybrid Boom Lifts















Power	Electric	;					Hybrid					
Platform Height	9m	10m	10.5m	12m	13m	13m	10m	13m	13m	14m	15m (Spider boom)	19m
Working Height	11m	12m	12.52m	14.19m	15.7m	15.7m	12.2m	15.4m	15.8m	16m	17.2m	20.8m
Outreach	6.4m	6.7m	6.78m	6.25m	6.1m	8.5m	6.1m	9.8m	7.62m	9.1m	9.6m	12.5m
Dimensions (LxWxH)	5.2 x 1.2 x 2m	5.43 x 1.34 x 1.99m	5.72 x 1.41 x 2m	5.28 x 1.5 x 2m	5.56 x 2.29 x 2.11	6.6 x 1.5 x 2m	4.1 x 1.5 x 1.9m	5 x 1.5 x 2.1m	5.56 x 1.79 x 2m	6.65 x 1.83 x 2.2m	6.3 x 1.5 x 2.1m	5.3 x 2.15 x 2.22m
Turning Radius	3.23m	2.85m	6.78m	3.15m	4.3m	3.7m	4.2m	4.4m	4.3m	3.5m	4.4m	4.0m
Lift Capacity	227kg	230kg	227kg	227kg	227kg	230kg	200kg	225kg	227kg	250kg	225kg	225kg
Gradeability	35%	25%	35%	30%	30%	25%	25%	25%	30%	25%	25%	40%













Battery Operated Vertical Mast Lifts and Aerial Work Platforms





	Battery Operated Vertical Mast Lifts	Aerial Work Platforms
Model	Skyjack SJ16	Genie AWP30
Working Height	6.75m	11.0m
Width	0.77m	0.74m
Length	1.37m	1.35m
Platform (W x L)	0.69 x 0.85m	0.66 x 0.69m
Height Stowed	1.79m	1.98m
Platform Capacity	227kg	159kg

Electric Scissor Lifts















Electric Scissor Li	fts					
Platform height	5.8m	5.8m	8m	8m	9.8m	12m
Working height	7.8m	7.8m	9.92m	9.92m	11.8m	13.8m
Extending deck	1m	1m	1m	1m	1m	1m
S.W.L.	227kg	227kg	227kg	454kg	317kg	350kg
Power	24v Batteries	24v Batteries	24v Batteries	24v Batteries	24v Batteries	24v Batteries
Dimensions (L x W x H)	1.83 x 0.76 x 1.99m	1.82 x 0.81 x 2.11m	1.73m x 0.81 x 2.44m	2.5 x 1.22 x 1.98m	2.5 x 1.22 x 1.88m	2.45 x 1.2 x 2.5m
Weight	1476kg	1503kg	2504kg	2371kg	2800kg	3170kg

















Specialist Electric	Scissor Lifts						
Platform height	12.19m	12.19m	13.2m	15.3m	16.5m	19.5m	26.0m
Working height	14.2m	14.2m	15.2m	17.3m	18.5m	21.5m	28.0m
Extending deck	0.91m	0.91m	1.2m	1.5m	1.5m	2.5m	2.1m
S.W.L.	363kg	360kg	500kg	500kg	500kg	750kg	750kg
Power	Electric	Electric	Electric	Electric	Electric	Electric	Electric
Dimensions (L x W x H)	3.1 x 1.75 x 2.83m	3.1 x 1.75 x 2.83m	3.34 x 1.19 x 3m	4.12 x 1.22 x 3.30m	3.74 x 1.2 x 3.4m	4.74 x 1.2 x 2.83m	5.60 x 1.32 x 3.21
Weight	5300kg	5700kg	4700kg	7600kg	7985kg	10900kg	18770kg

Diesel Scissor Lifts

















Diesel Scissor Lift	S							
Platform height	7.8m	8.2m	9.5m	10.1m	12.3m	13.1m	15.2m	16.2m
Working height	9.8m	10.2m	11.5m	12.1m	14.3m	15.1m	17.2m	18.2m
Extending deck	1.55m	1.2m	1.5m	1.87m	0.9m	2.59m	2.4m	2.59m
S.W.L.	567kg	565kg	454kg	1134kg	680kg	500kg	907kg	500kg
Power	Diesel							
Dimensions (L x W x H)	2.67 x 1.73 x 2.35m	3.06 x 1.80 x 2.37m	3.12 x 1.73 x 3.12m	4.88 x 2.13 x 2.68m	4.88 x 2.29 x 2.86m	3.98 x 2.29 x 2.93m	4.47 x 2.34 x 3.16m	3.98 x 2.29 x 3.15m
Weight	2971kg	3560kg	3655kg	5640kg	5148kg	6340kg	7395kg	7300kg













Model	45kVA	60kVA	80kVA	100kVA	160kVA	275 - 720kVA
Fuel Tank Cap	330L	400L	250L	40L	250L	-
Generated Voltage	400V	400V	400V	400V	400V	-
Dimensions (LxWxH)	2142 x 1070 x 1750mm	2160 x 1070 x 1760mm	2600 x 1180 x 1620mm	2600 x 1180 x 1620mm	2600 x 1180 x 1620mm	-
Dry Weight	1382kg	1300kg	1400kg	1690kg	1690kg	-

Traffic Mangement

Traffic Management

Mesh Fence









Hire rate includes: Backstays.

A building site or premises with tools, materials, plant and other machinery can be very inviting to a thief - additionally the site could be a break-in route into adjacent properties.

These temporary 2.85 m wide mesh panels improve site security and are a cost-effective deterrent to theft and vandalism.

Supplied with rubber feet and stabilisers, the strong close mesh provides a secure barrier. Fencing is now a Health & Safety necessity to keep the public out and protect them from site hazards.

- · Pedestrian and vehicle gates easily fitted
- · Ideal for event crowd control
- Panels conform to HS (G) 151

Technical Specification	
Dimensions (L x H)	2.85 x 2m
Weight	33kg (panel), 33kg (foot)








Solid Fencing









Note: When screens are being used externally, additional ballast will normally be required, which is the responsibility of the hirer. Please refer to BS 6399 for notes on compliance. Example: In a town or city, 80km inland and 50m above sea level, each rubber foot requires 366kg of ballast. Other locations and conditions will require greater amounts of ballast.

- · Strong vandal resistant panels
- Easy to assemble and transport 2.2 m panels

Technical Specification		
Dimensions (L x H)	2.2 x 2m	2.2 x 2m
Weight	49kg (panel), 33kg (foot)	49kg



Traffic Management

Pedestrian Barrier









Constructed from tough, strong galvanised steel, these 2.4 m long barriers are ideal for pedestrian control. Barriers can be interlocked to form an effective chain that can be easily erected and dismantled.

- Diverts pedestrians away from potential hazards
- Each barrier stands 1.2 m high

Technical Specification	
Dimensions (L x H)	2400 x 1200mm
Weight	11kg



2m Guard Barrier + Foot







These highly visible 2 m long guard barriers are recommended for placing around temporary roadworks, groundworks and open excavations. Designed to be linked together, each 1m high barrier features top-faced reflective material on one side.

- Built-in feet swivel through 360° for positioning
- HDPE construction High impact strength and durability

Technical Specification	
Dimensions (L x H x W)	2000 x 1000mm
Weight	14kg



Variable Message Signs

Variable Message Signs

Ireland's Largest Supplier of Variable Message Signs (VMS)

- · Visible from up to 335m away.
- Direct message to your customers.
- · Solar powered, running 24 hrs/day.
- Only a small space needed narrower dimensions than a car.
- Displays range of text message, graphic or animation in amber or 5 colour mode
- · Easy to transport, maintain and manage.

Ideal for:

- Retail, Hotels, Garages
- Traffic management & road works
- Advertising and Communications
- Public notices of upcoming events



Accommodation

20ft x 8ft Office

- 2 Desks & 2 Soft Chairs & 2 Notice Boards
- 32Amp 240 Volt Inlet Plug
- Data Inlet Connection
- 3 Double 13amp Sockets, 2 with USB charging
- 1 Single 13amp Socket
- 1 Oil Filled 750 Watt Energy Efficient Heater
- 1 Coat & Hat Rail
- · White GRP easy clean walls & ceiling
- High Density Insulation



Technical Specification	
Windows	2 x double glazed
Lights	2 x LED Strip lights
Door	1 x Multi Point Lock Steel door
Flooring	Black Anti Slip Vinyl






20ft x 8ft Canteen

- 32Amp 240 Volt Inlet Plug
- Fresh Water & Waste Water Connections
- Data Inlet Connection
- Stainless Steel Sink Unit with Hot Water Tap
- 2 Double 13amp Sockets with USB charging
- 1 Oil Filled 750 Watt Energy Efficient Heater
- · White GRP easy clean walls & ceiling
- High Density Insulation
- · Canteen Table & 8 Canteen Chairs

Technical Specification	
Windows	2 x double glazed
Lights	2 x LED Strip lights
Door	1 x Multi Point Lock Steel door
Flooring	Black Anti Slip Vinyl

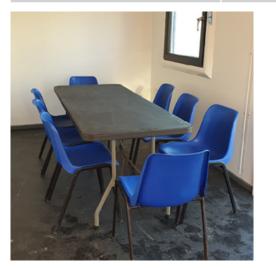

Accommodation

20ft x 8ft Drying Room

- 32Amp 240 Volt Inlet Plug
- Data Inlet Connection
- 3 Double 13amp Sockets, 2 with USB charging
- 1 Single 13amp Socket
- 1 Oil Filled 750 Watt Energy Efficient Heater
- White GRP easy clean walls & ceiling
- High Density Insulation

Technical Specification	
Windows	2 x double glazed
Lights	2 x LED Strip lights
Door	1 x Multi Point Lock Steel door
Flooring	Black Anti Slip Vinyl



20ft x 8ft Toilet Block

- Fresh Water & Waste Water Connections
- Rodding Eyes
- 4 Unisex Single WC's, & 1 Urinal trough all with Hand Dryers, Sinks, Hot Water & Heating
- 3000l Internal Effluent Tank or Mains Connection
- Red & Amber Tank Level Indicators
- · White GRP easy clean walls & ceiling
- High Density Insulation

Technical Specification	
Heating	Thermostatically controlled Blown Air
Lights	5 x PIR Lights
Door	5 x Multi Point Lock Steel door
Flooring	Black Anti Slip Vinyl



Accommodation

EcoSmart 6 Person Welfare unit

Mobile self contained welfare facilities, ideal for any size or type of site.

- Efficient Eco smart technology
- Powerful Economical Generator
- Easy to move
- No nonsense 30 second Set up

- Fully insulated wall and roof system with no cold bridging
- PIR activated LED lighting & hot water without the need for the generator
- Low noise pollution
- Low fuel consumption
- Low CO2 emissions
- Automatic generator timed shu

Technical Specification	
Payload	250kg
Gross Weight	1800kg
Unladen Weight	1650kg
Dimensions (mm)	20(w) x 3615(L) x 2700(H)
Toilet Waste Capacity	1101





Portable Toilets - Maxim 3000



This model is incredibly strong and spacious. By utilizing blow-mold technology to create twin-panel walls and a blow molded front, the cabana is almost indestructible. The cabana is also strengthened by interlocking corners, a fitted base and an overlapping roof design.

Technical Specification	
Height x Width	2286 x 1118mm
Depth	1219mm
Door Opening	610mm
Floor Area	5277cm2
Tank Volume	265L
Weight	85.8 kg





Portable Toilets - Mondo



This model is low maintenance and has a spacious, well ventilated interior to reduce odors. Using fewer parts made from high density polyethylene, the Mondo can withstand impact and abusive handling without cracking or breaking.

Technical Specification	
Height x Width	2310 x 1118mm
Depth	1219mm
Door Opening	1937mm x 609mm
Floor Area	1041mm x 533mm
Tank Volume	227L
Weight	73.5kg







Breaking	Cleaning	Surveying Carpentry		Heating, Cooling
& Drilling		& Fixing		& Drying
Welding	Sanding	Sawing, Cutting	Lifting, Handling	Concrete &
	& Fixing	& Grinding	& Safety	Surface Work

See our vast range of tools at laoishire.com

Battery Powered Site CCTV Solution

The innovative BauWatch GreenLight – for the ultimate solution for intruder prevention and detection

GreenLight for project security

If you are responsible for a burglary-prone construction project, vacant property or a storage site for building materials, you'll also want to ensure nobody can enter to steal or vandalise the premises outside of working hours. Apart from loss and damage caused by burglary, the construction project can also suffer delays. In addition to the commercial implications of a delay, there's a potential impact on personal and company reputation.

Prevention and Detection

The BauWatch GreenLight allows you to kill two birds with one stone: prevention and detection. Most vandals are deterred by the bright green light and run away. Those who do make an attempt to break in are immediately detected. Our 24/7 emergency room views the razor-sharp video recordings online and ensures the culprits get arrested. The

BauWatch GreenLight is ideal for:

- Construction site security
- Real estate and vacant property Parking security

Technical Specification	
Camera detection range	Maximum 100m
Type of detection	Video analysis for reliable detection
Internet connection	Integrated secure Internet connection
Power supply	230V with 48Hr backup battery
Alarm follow-up	24 / 7 connection with our emergency centre
Lights	Standard green, optional white or IR
Required space	2.5m x 2.5m
Dimensions	520kg/6.20m height



Don't let bad weather stop your progress.

Secure your site surveillance with the BauWatch Solar.

A sunny solution, even in bad weather

You don't want theft or vandalism to impact on your project delivery date. Even if there is no power supply for a surveillance system at your construction site, you still need reliable security. That is why you choose a high-functioning security system that is always working for you, come rain or shine. For example, camera surveillance that runs on solar energy with a 'bad-weather guarantee.' If clouds block out the sunlight, the system automatically switches to an alternative built-in energy source.


Environmentally friendly back up

CO_a-neutral is currently a hot topic, and this includes construction sites. Convenience is what matters to you. BauWatch provides an excellent solution in the form of the Solar: this easy-to-move stand-alone camera is equipped with solar panels and a fuel cell on methanol. Thanks to the direct connection to our 24/7 control room, your construction site is always being effectively monitored. So, you can be environmentally friendly, whilst ensuring the progress of your construction project.

The BauWatch Solar is ideal for:

- Construction sites without power supply
- Infrastructure projects
- · Wind and solar farms

Technical Specification	
Camera detection range	Maximum 100m
Type of detection	Video analysis for reliable detection
Internet connection	Integrated secure Internet connection
Power supply	Fuel cell, 3 solar panels and 48-hour back-up battery
Alarm follow-up	24 / 7 connection with our emergency centre
Lights	Standard IR LED or none
Required space	2.5m x 2.5m
Dimensions	725kg / 6.64m

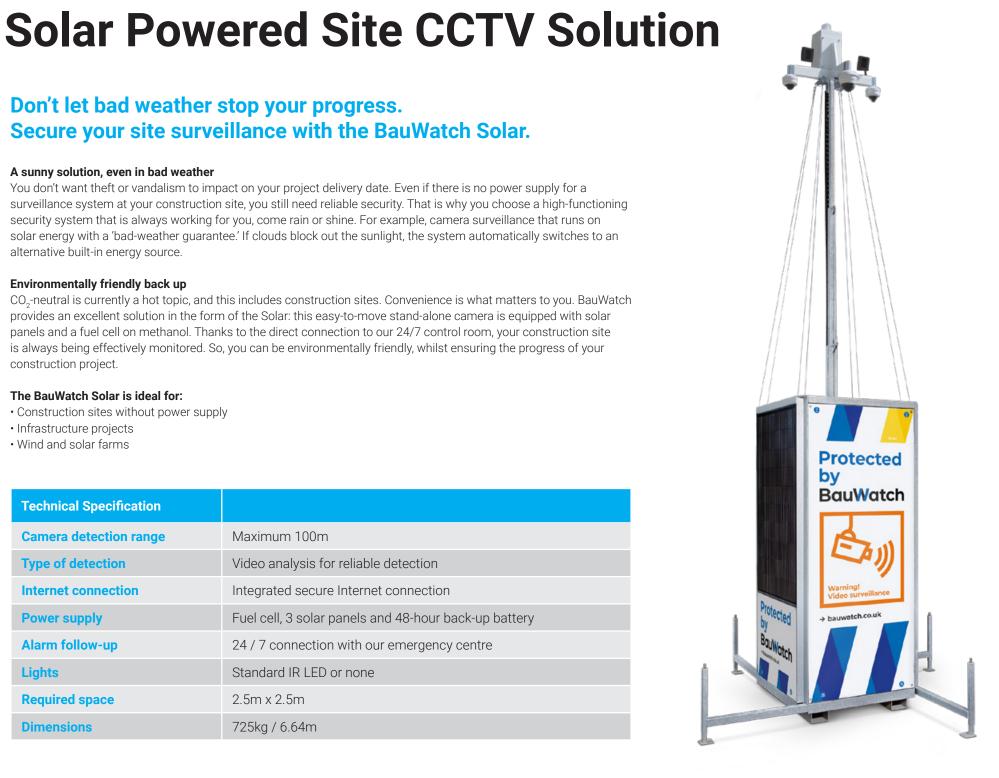

26 Locations Nationwide!

GPT Hire Carlow

Green Road, Ballycarney, County Carlow, R93 KW86 **Tel:** (059) 913 1434

GPT Hire Cork

Little Island Industrial Estate, Little Island, Co. Cork., T45 A782 Tel: (021) 435 3300

GPT Hire Dublin

Bluebell Works, Naas Road Dublin 12, Dublin, D12 CP29 **Tel:** (01) 450 7533

GPT Hire Galway

GPT Industrial Estate, Tuam Road Galway, Co. Galway, Galway **Tel:** (091) 755 793

GPT Hire Limerick

Ballysimon Road, Limerick, Co. Limerick, V94 XTY5 **Tel:** (061) 313 637

GPT Hire Sligo

Finisklin Sligo, F91 K795 **Tel:** (071) 916 9013

GPT Hire Waterford

Slieverue Co. Waterford **Tel:** (051) 833 760

Laois Hire Portlaoise

Clonminam Industrial Estate Portlaoise,Co. Laois **Tel:** (057) 866 0232

Laois Hire Nurney

Flemings Hire and Service Rathconnell, Co. Kildare **Tel:** (059) 862 6157

Laois Hire Athy

Kilkenny Road Athy, Co. Kildare **Tel:** (059) 864 0555

Laois Hire Dublin

Greenogue Industrial Estate, Rathcoole, Co. Dublin **Tel:** (01) 902 2331

Aerial Platform Hire Kildare

Clane Business Park, College Rd, Common, Clane, Co. Kildare, W91 ET02 **Tel:** 1800 110 110

Aerial Platform Hire Cork

Limerick Rd, Baltydaniel West, Mallow, Co. Cork P51 FV50 **Tel:** 1800 110 110

Aerial Platform Hire Limerick

Castlemungret, Mungret, Co. Limerick, V94 F9V2 **Tel:** 1800 110 110

Aerial Platform Hire Dublin

Unit 1, Crosslands Industrial Estate, Ballymount Road Lower, Dublin 12, D12 C791 **Tel:** 1800 110 110













